

AP-E1

LiDiC

Line-in Digital Converter

USER GUIDE



Convert it to digital, enjoy it on Beyonwiz PVR and PC via Beyonwiz PVR

beyonwiz
Invent Your Future

Introduction

Thank you for your kind purchasing of the Beyonwiz LiDiC (Line-in Digital Converter) product. As a basic function, the LiDiC converts external video source to digital H.264 format. Thus it provides easy and useful ways of recording and time-shifting for the converted files through Beyonwiz PVR. Hope you enjoy this unique unit fully along with Beyonwiz PVR.

- Converting external video source to digital H.264
- Recording external video source to Beyonwiz DP-S1 or DP-P1 as H.264 video format
- Transferring H.264 video format to PC via Beyonwiz DP-S1 or DP-P1.
- Time-shifting function for external video source with DP-S1 or DP-P1.
- Timer recording for external video source with DP-S1 or DP-P1.

Specification

Video & Audio Input

Video Input	Composite, S-Video
Audio Input	Stereo RCA
No. of Input Port	2 Composite Video, 2 S-Video, 2 Stereo Audio

Video & Audio Format

Digital Video Format	H.264 MP@L3.0 (576i)
Digital Audio Format	AAC-LC (Stereo)

Video & Audio Output

Video Output	Composite, S-Video
Audio Output	Stereo RCA



*Bypass the selected Video & Audio input

Physical Specification

Size	150x150x45 mm
Weight	340g

Package Contents

- LiDiC (AP-E1)
- User Manual
- USB Cable
- RCA Audio/Video Cable




How to Connect

Step 1: Connect a video source such as a satellite STB (Set-top Box) to LiDiC.

Step 2: Connect the LiDiC to DP-S1 or DP-P1 via USB port.

NOTE

- You can connect two video sources to LiDiC but only one can be selected at a time.
- The LiDiC can bypass the selected video and audio inputs.

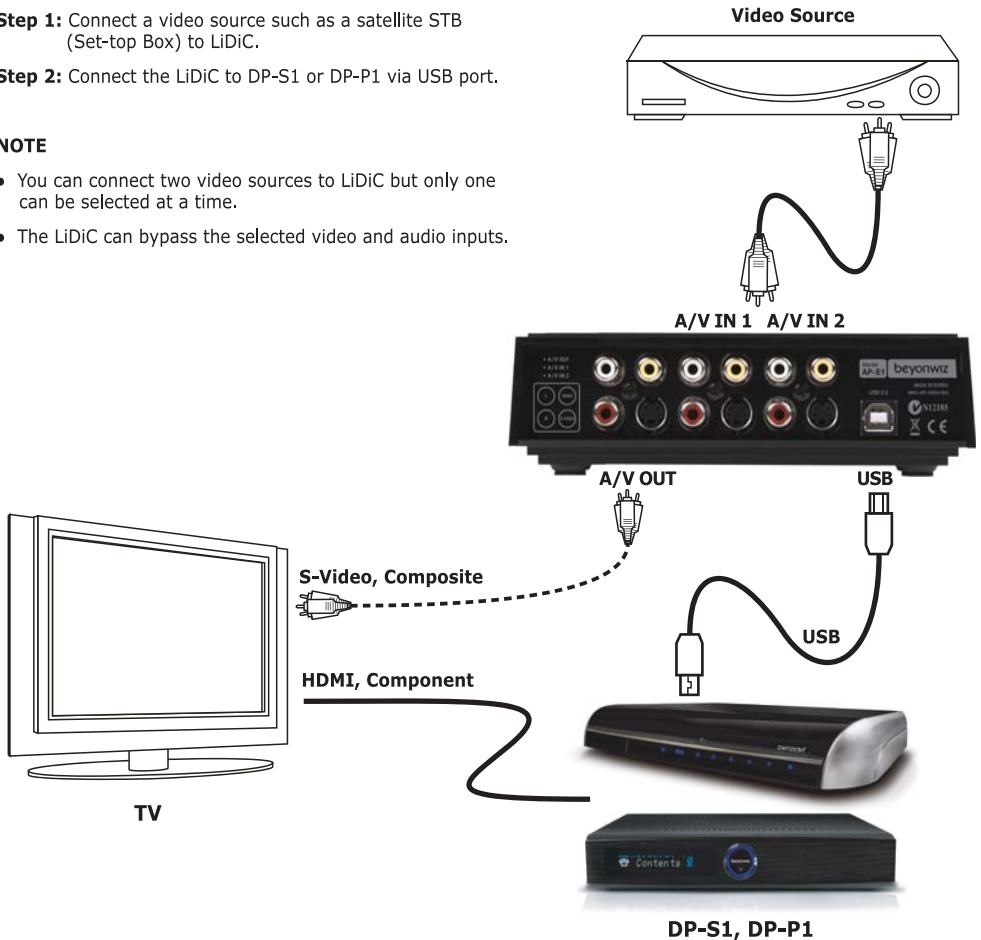

Operation


Watching External Video Source via LiDiC

After setting up the LiDiC, new items named "LiDiC 1" and "LiDiC 2" listed on the service list.

Please select the "LiDiC 1" or "LiDiC 2" to watch the external video source connected to "A/V IN 1" or "A/V IN 2" respectively.

NOTE

- If you select the "LiDiC 2" on the service list, the LiDiC bypasses the "A/V IN 2" to the "A/V OUT" port. Otherwise, the "A/V IN 1" is bypassed to the "A/V OUT" port.

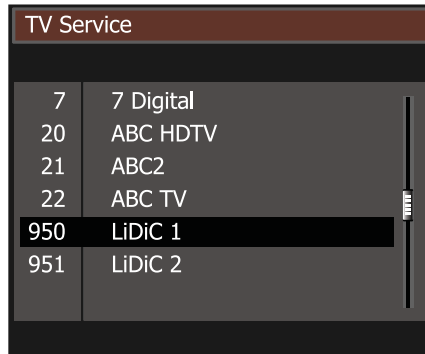

Time-shifting for External Video Source

You can use all the time-shifting functions for the external video source with DP-S1 or DP-P1.

Please refer to user's manual of DP-S1 or DP-P1 for more information about the time-shifting functions.

Recording External Video Source

You can record the external video source to DP-S1 or DP-P1 as H.264 digital video format.

You can also set timers for recording the external video source.

Please refer to users' manual of DP-S1 or DP-P1.

Backup Recording Files

As you backup the recording files to a USB storage or PC with DP-S1 or DP-P1, you can also backup the recording files generated with the LiDiC to a USB storage or PC.

Please refer to users' manual of DP-S1 or DP-P1.

NOTICE : This product is only for private use within the household. The recording must be for domestic or private use, not for commercial use at all. The recorded programs can't be sold or even given to anyone else.

Warranty Conditions

1. Where required by Beyonwiz only the original invoice/receipt issued by the dealer will be accepted as proof of purchase.
2. Beyonwiz may reject warranty claims on equipment which it believes to be illegally acquired or when the "owner" is unable to provide proof of purchase or where security labels or serial numbers have been tampered with or removed.
3. The warranty covers only defects in the material and workmanship of the product for a period of 12 months from the date of original purchase.
4. This warranty is on "Return to Base" basis. The owner is responsible for the delivery of the equipment to the point of purchase and for collecting the repaired or replaced equipment from the same location.
5. The warranty is void if failures arise as a result of any of the following. i) Abuse, misuse, physical impact, normal wear and tear. ii) Alteration or repairs carried out without written authorization from Beyonwiz. iii) Upgrade that are not registered by Beyonwiz iv) Operating or maintained other than in accordance with the manual supplied.
6. This equipment will not be considered defective as a result of incompatibility with other equipment or accessories other than the ones supplied with the unit at the time of purchase.
7. This unit should be returned in its original carton and protective packaging or alternatively in a packing suitable to prevent damage. Beyonwiz will not accept any responsibility for goods damaged whilst the goods are in transit.
8. Repair or replacement under the terms of this warranty does not give the right to extension or a beginning of a new warranty period. Repairs or replacements may be carried out with functionally equivalent reconditioned parts or equivalent part. Parts that have been replaced become the property of Beyonwiz.
9. The customer acknowledges that no promise representation or undertaking has been given by Beyonwiz or its dealer in relation to equipment other than as contained in this warranty.
10. A service charge will apply if the fault is not covered within the conditions of this warranty or if there is no fault found. The charge will be based on the current market rate.
11. Beyonwiz is not liable for any other loss other than the unit itself.
12. Nothing contained in this warranty shall be read or applied so as to affect the right of the consumer in relation to the provisions of the trade practices act or other statutory rights provided by legislation of the state or territory. In the absence of applicable legislation this warranty will be purchases sole and exclusive remedy and neither Beyonwiz nor its distributors or agents shall be liable for any incidental or consequential damages for breach of any express or implied warranty of this equipment.



- The product must not be exposed to water or liquid.
- Do not repair, disassemble or modify this apparatus yourself. It can be seriously damaged, possibly beyond repair
- Do not place heavy objects on top of the product. It might cause malfunction or damage.
- Do not drop the apparatus or subject it to impact. The product might be damaged.

Beyonwiz Australia

support@beyonwiz.com.au

www.beyonwiz.com.au

Some features and information in this manual may differ slightly from the product itself due to firmware version and changes made after printing.

Copyright

This manual is protected by copyright laws.

Copy, use, reproduction of this manual in part or whole without beyonwiz's prior written permission is prohibited.

Disclaimer

The manufacturers, distributors and agents are not liable to any kind of damage caused by the use of the information contained in this manual

The instruction and descriptions which this manual contains are based on the time of this manual's production.

The manufacturer constantly updates it with new functions and technology.

All the specifications are subjects to change without prior notice.

Trademark

The USB-IF Logos are trademarks of Universal Serial Bus Implementers Forum, Inc.



WEEE information

Correct Disposal of This Product (Waste Electrical & Electronic Equipment)

This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.